



Type N Stressing Anchorage

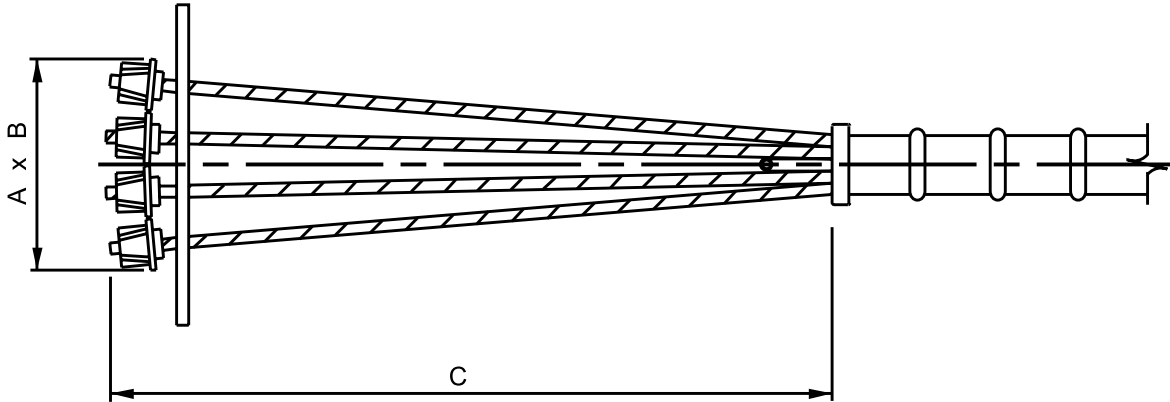

Type	Dimensions (Inches)		
	Vertical		
	A	B	C
N 5-4	9.75	5	36
N 5-5	12.25	5	36
N 6-4	14.00	6	36

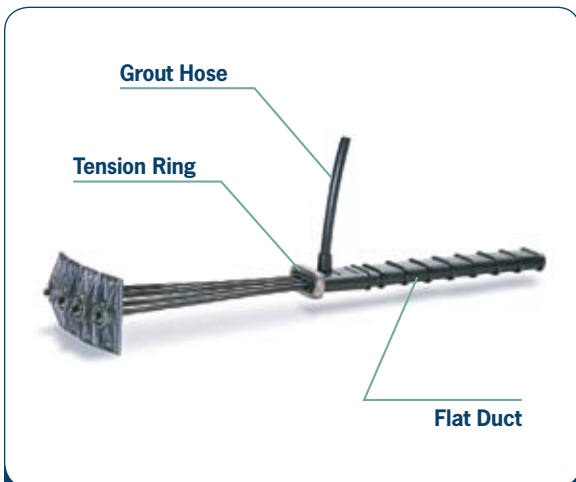

Notes:

- Other sizes available on request.
- For proper design and detailing of anchorage zones and related reinforcements, refer to the VSL Publication *Detailing for Post-Tensioning*.
- Tension ring required.

Dimensions are valid for:

- Nominal concrete cylinder strength at 28 days: 4000 psi (28 MPa).
- Maximum prestressing force may be applied when concrete reaches a cylinder strength of 80% of its nominal strength or 3,000 psi (20 MPa) whichever is less.
- Temporary overstressing to 80% of Guaranteed Ultimate Tensile Strength.
- Information for other concrete strength and conditions are available from your local VSL Representative.

www.vsl.net • 888-489-2687